



TUZ-2AB Series Spec Sheet

Model #	Description
TUZ-2AB-9W-XK-FL	2FT, 9W, AC100-277V, 4000K or 5000K, 1,150 Lumens, TYPE A+B, Single and Double End Power, UL and DLC Listed
TUZ-2AB-10W-3500K-FL	Tube, 160 Degree BA, G13 Base, 10W, AC120-277V, 3500K, 2FT, 1,960 Lumens, CRI 83, Frosted Lens, ALU+PC, Double Ended Power UL & DLC Listed



G13






Installation Instructions:


1. Turn off the power to the light fixture at the breaker panel before installation.
2. Open the diffuser from the light fixture.
3. Remove the fluorescent tubes.

Please dispose of these items properly as they contain mercury.

4. Cut the wires shown as the diagram below.

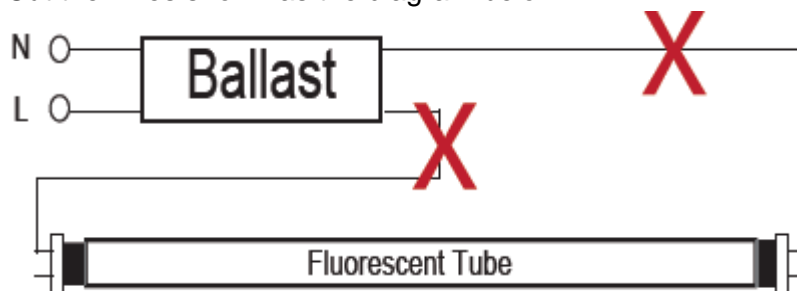

5. Make the new wire connect to branch circuit shown as the diagram below.
6. Replace the cover over the wiring channel.
7. Install the LED tubes, close the diffuser.

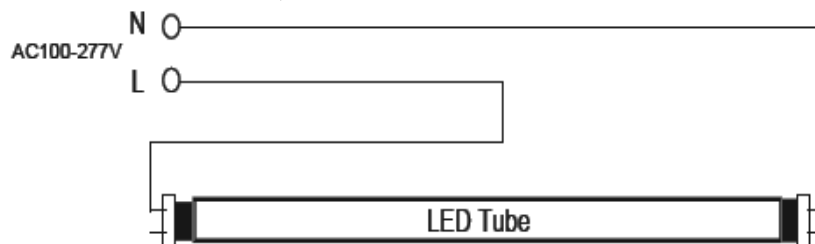

8. Turn on the power.



BestLight LED

Redefining the LED Marketplace

Note:

1. Use in indoor damp locations ONLY, Not suitable for wet locations.
2. The product should be installed and operated by a qualified electrician or technician in accordance with relevant local codes.
3. Caution risk of electric shock. Ensure that main power source is off when wiring or soldering the sections of the product.
4. Caution - if the lamp or luminaire fixture operate abnormally (buzzing, flickering, etc.), please turn off power immediately, then remove lamp from luminaire and contact manufacturer
5. Caution - risk of fire - do not install this lamp in a luminaire